

Whole House Water Filter

With Valve in Head

Models FC150 & FC350



PROTECTS AGAINST



Sediment

Water supplies often have high levels of sediment and particulates, such as rust, sand, silt, mud, loose scale etc. Sediment is aesthetically undesirable in water and can reduce the life of plumbing fixtures, appliances, pump seals and hot water tanks. Rainfresh Valve-in-Head whole house sediment filter reduces fine sediment giving you clean fresh water throughout the home.

It can be used on any water source, well, lake, river or municipally treated, and is ideal for home, cottage, farm, office, boat or RV. It reduces sediment even finer than can be seen with the naked eye.

- Installs easily on copper, PEX or CPVC pipe in less than 30 minutes
- For use in urban or rural homes with up to 3 ½ bathrooms
- Delivers clean, fresh water for the entire home

A must-have
for every
home!



Built-in Bypass Valve & Pressure Relief

Built-in valve for shut-off or bypass. To change cartridges, simply turn valve to OFF position to shut water off and automatically vent pressure. Change cartridge in seconds!



Easy-open Housing – No Wrench Required !

Unique easy-open filter housing that does not require the use of a filter wrench. Simply grab the sump and turn 1/8th clockwise to open the sump, without using any tools.


Transparent Sump – See your filter working!

The clear transparent sump allows you to see the filter condition without turning the water off.




Installation choices

The unit can be either used as a single filter or in series as a final filter after a coarse pre-filter for cleaner water.

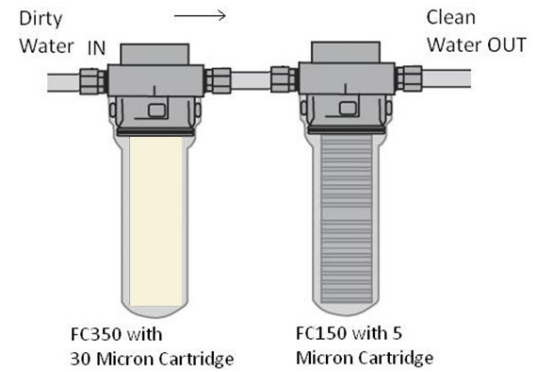

MODELS AND SPECIFICATIONS

MODEL	Sediment Reduction (Nom)	Cartridge (Included)	Unit Width	Unit Height	Unit Depth	Inlet / Outlet
FC150	5 micron	CF1	4.75"	13.75"	4.75"	3/4"
FC350	30 micron	CF3	(12 cm)	(34.9 cm)	(12 cm)	FNPT

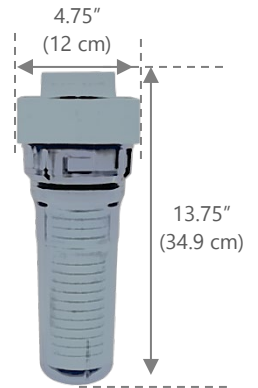

- Max Flow Rate @ 60 psi feed pressure : 7.5 US GPM (28.3 LPM)
- Feed Water Pressure : 10 to 100 psi* (68.9 to 689 kPa)
- Water Temperature Range : 4°C to 37°C (39 to 100°F)
- Cartridge Life : 6 months** or when pressure drops by 10 psi
- For use with (pipe material) : Copper, PEX or CPVC. Connector kit sold separately
- Mounting Bracket : Part # 1504P (sold separately)
- Head Seal : Part # 518P (Included)

* - If water pressure exceeds the rated pressure, a pressure regulator & water hammer arrestor must be installed before the filter. It is recommended that the pressure regulator be set at 75 psi or less. **NOTE: Not for use in buildings over 4 storeys high.**

** - Cartridge life is directly dependent on water conditions. High sediment levels or water use may cause more frequent replacement.



Tested & certified by CSA Group to CSA B483.1, to NSF/ANSI 61 for material and structural integrity requirements only.



5 year limited warranty



Aug 2026

Envirogard Products Limited

446 Major Mackenzie Drive East, Richmond Hill,
ON L4C 1J2, CANADA

Toll Free: 1-800-667-8072 • **Tel:** (905) 884 9388 ;

Fax: (905) 884 3532 • **E-Mail:** info@rainfresh.ca

Web: www.rainfresh.ca