

BG11S

COFFEE / HOT BEVERAGE WATER FILTER SYSTEM



For low to medium volume brewers

Water is the key ingredient in coffee and other hot beverages. The quality of water, therefore, greatly affects the quality of coffee or other beverages made by it. Rainfresh **BG11S** stainless steel filter system is designed to provide high quality water for hot beverages like coffee and tea for low to medium volume applications. It is ideal for use in office serveries, kitchens or cafeterias in multi-storeyed buildings.



It enhances the beverage taste by reducing chlorine, bad tastes and odours, and protects the beverage equipment from the damaging effects of sediment and scale.

PROTECTS AGAINST


- Reduces chlorine, chemicals and associated taste and odours in the water that affect the aroma and taste of hot beverages
- Inhibits scale build-up on the beverage equipment
- Provides crystal clear water for beverages by reducing sediment, dirt, rust and other particulates in the water

- Chlorine, taste and odour
- Scale build-up
- Sediment

For high water pressure

A water pressure gauge is included to monitor pressure variations and spikes. It also indicates cartridge plugging (when differential pressure exceeds 15 psi).

FEATURES & BENEFITS

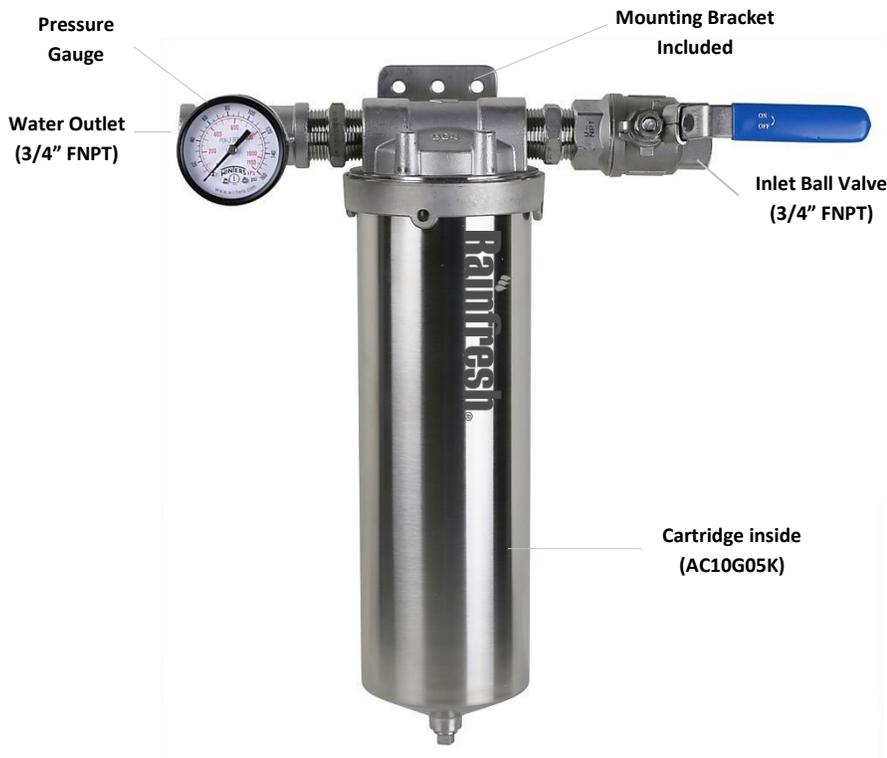


- High quality water for coffee, hot beverages and even drinking
- Single system can supply filtered water to coffee machine as well as drinking
- Extends life and reliability of beverage equipment
- Reduces machine service frequency and improves efficiency
- Robust stainless steel construction for high water pressure applications up to 150 psi

System Dimensions

Model	Unit Width	Unit Height	Unit Depth
BG11S*	10.5" (267 mm)	14.5" (368 mm)	6.5" (165 mm)

- * - a) For cold water use only. This product is for commercial use only.
 b) Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

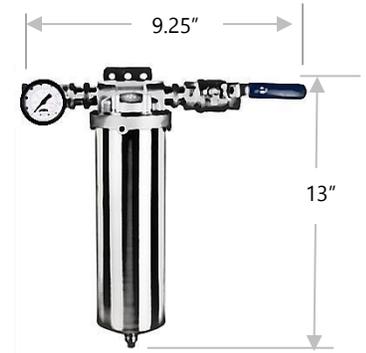

Operating Specifications

Rated Capacity	: 2,000 US gal - (30,000 small coffee cups or 21,000 medium coffee cups)
Inlet/Outlet Connections	: ¾" FNPT
Max. Service Flow Rate	: 1.5 US GPM (5.7 LPM)
Max. Temperature	: 100 F (38°C)
Max. Pressure	: 150 psi (1034 kPa)**

** If pressure surges or water hammer conditions exist, a pressure regulator and/or water hammer arrestor should be installed.

Cartridge Specifications

Replacement Filter	Function	Micron Rating	Cartridge Life
AC10G05K	Reduction of sediment, chlorine, taste and odour, inhibition of scale	5µ	2,000 US gal or 6 months [^]
CA10G05K	Optional replacement cartridge for reduction of CHLORAMINES, chlorine, taste and odour, sediment and inhibition of scale	5µ	2,000 US gal or 6 months [^]

[^]Cartridge life may vary with water quality and usage.

Limited 1 year warranty

Jan 2019



Envirogard Products Limited

446 Major Mackenzie Drive East,
 Richmond Hill, ON L4C 1J2, CANADA

Toll-free: 1 800 667 8072 ; **Tel:** (905) 884 9388; **Fax:** (905) 884 3532

E-Mail: info@rainfresh.ca ; **Web:** www.rainfresh.ca