ESS4

Commercial / Industrial Filter Housings





Rainfresh ESS4 model filter housings, constructed of durable stainless steel, meet general purpose industrial and commercial filtration needs.

The ESS4 Model cartridge filter housing accommodates four cartridges of 10" nominal length and 2.5". The ESS4 filter housing handles liquids at pressures and temperatures of up to 150 psi at 176°F.

Design Features

- Heavy-duty, rugged SS304/316 construction
- Positive cartridge seal
- Clamp for quick and easy opening
- Housing uses 9¾", 9 7/8" or 10" filter cartridge
- Sludge and Clean-side drains for simple and easy maintenance.
- Air-Vent for venting before start-up or draining.

FEATURES

- Heavy Duty Design
- Rugged, Longlasting SS
 Construction
- Easy Cartridge Change-out
- Top Pressure Relief Vent
- Dirty & Clean Side Drains for Simple Maintenance

APPLICATIONS

- Commercial buildings, motels, etc.
- Commercial kitchens
- Industrial process or wash water
- Water treatment plants

Specifications

Table 'A' lists general specifications for ESS4 model housing. Note that maximum operating temperature and pressure is for housing only. Actual system operating conditions depend on the filter cartridge and gasket used in the housing.

Model	Inlet /	Max	Max Flow	Ideal Flow	Dimensions	No. of	Shipping
	Outlet	Pressure	Rate	Rate	Ht x Dia	Cart.	Wt
ESS 4	2" MNPT	150 psi 10 bar (Kg/cm²)	28 GPM 106 LPM	12 – 16 GPM for highest cartridge efficiency	19" x 10"	4 (10"x2.5")	20 lbs 9.09 Kg

Table A: ESS4 Specifications


Cartridges not included

Caution: Do not use for air or compressed gas filtration


Cartridge model choices – MB10N $_$ N (Add micron rating for part #. E.g. for 5μ cartridge, part # is MB10N05N.

Note: When sizing filtration system, amount of contaminant to be removed should be considered in addition to flow rate and desired pressure drop. Systems sized on low initial pressure drop enhance cartridge life.


PARTS LIST

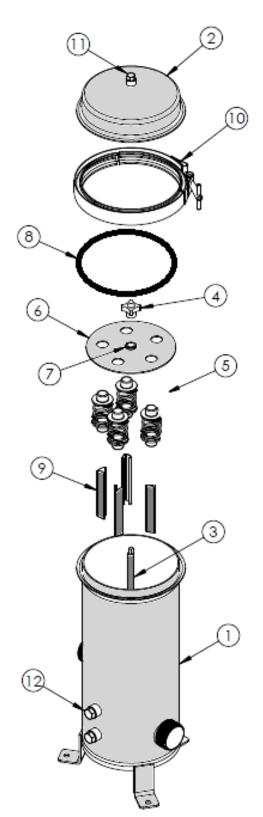


Part #	Description		
1	Filter Housing body (304SS or 316SS)		
2	Lid for housing (304SS or 316SS)		
3	Tie rod (304SS or 316SS)		
4	Tie rod nut (304SS or 316SS)	1	
5	Spring assembly for filter cartridge sealing	4	
6	Hold down plate	1	
7	Hold down plate post with ext return ring kit (304SS or 316SS)	1	
8	O-ring 199.5 mm ID, 11 mm CS, BUNA	1	
9	V post (304SS or 316SS)	4	
10	V-band clamp	1	
11	Pipe plug, ¼" HEX head (304SS or 316SS)	1	
12	Pipe plug, ½", HEX head (304SS or 316SS)	1	



DIMENSIONS AND CROSS SECTION

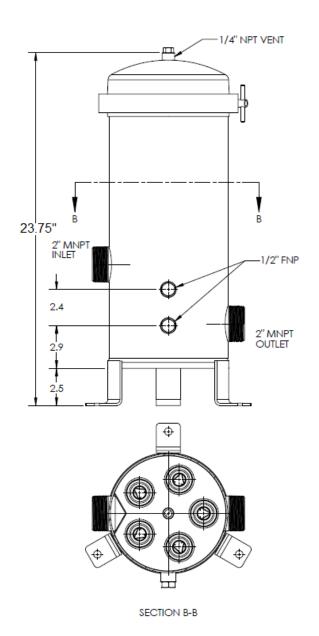

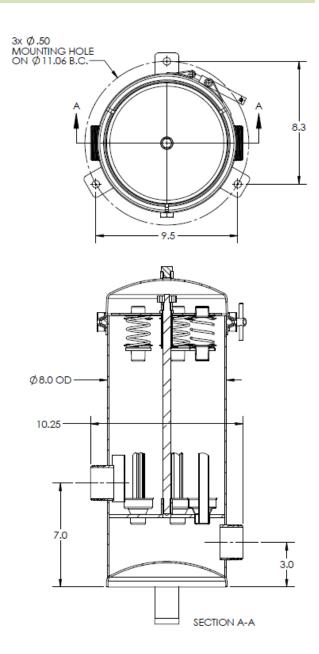

5 year limited warranty

About Envirogard

For over 50 years, Envirogard has been leading the water treatment industry in Canada by providing high quality products and solutions at affordable prices. "Rainfresh" brand products are used by homeowners & commercial facilities across Canada and in over 40 countries worldwide.



Envirogard Products Limited

446 Major Mackenzie Drive East, Richmond Hill, ON L4C 1J2, CANADA

Toll Free: 1800 667 8072; Tel: (905) 884 9388 Fax: (905) 884 3532; E-Mail: info@rainfresh.ca

Web: www.rainfresh.ca