

CTFE948 Tannin Filter
Installation & Operation Manual
(Please save for future reference)



Thank you for purchasing one of our ENVIROGARD / Rainfresh Water Tannin filters. We are committed to ensuring that you are **totally satisfied**.

If you have any problems, don't go back to the store – **please contact us !**

Most issues can be resolved over the phone.

Help Line : 1-800-667-8072 (Monday to Friday 8:30 AM to 5:00 PM EST)

www.rainfresh.ca

TABLE OF CONTENTS

System Specifications	2
How Your Water Conditioner Works	2
Safety Precautions	2
Cautions Before Installation	3
Installation	3
a) Electrical Requirements	3
b) Unpacking the unit	3
c) Plumbing the Tannin filter	5
d) Start-up and Programming	6
a. Control Valve	7
b. Level 1 Programming	7
c. Level 2 Programming	11
Other Features	12
Maintenance	13
Troubleshooting	14
Exploded Diagram & Parts List	15
Warranty	16



SYSTEM SPECIFICATIONS & DIMENSIONS

Rainfresh Model	Recommended Flow Rate US GPM (LPM)	Max Flow to drain US GPM (LPM)	Media Tank size Dia x H (Inch)	Salt tank size Dia x H (Inch)	Inlet/Outlet connections	Shipping Weight lbs (Kg)
CTFE948	3 (11.5)	1.0 (3.8)	9" x 48"	21"x36"	¾" MPT	90 (40)

- Feed Water Temperature = 4°C - 38°C (39 - 100°F)
- Operating Pressure = 25 (172 kPa) - 100 PSIG (689 kPa)*
- Voltage = 110 V AC

* **Note:** Install pressure regulator and water hammer arrestor if pressure exceeds rated pressure at any time.

- At the stated service flow rates, the pressure drop through these devices will not exceed 15 psig.
- The manufacturer reserves the right to make product improvements which may deviate from the specifications and descriptions stated herein, without obligation to change previously manufactured products or to note the change.

The manufacturer reserves the right to make product improvements which may deviate from the specifications and descriptions stated herein, without obligation to change previously manufactured products or to note the change.

Feed Water Quality:

Water hardness < 3 gpg, Iron < 0.5 PPM; Manganese < 0.05 PPM ; Turbidity < 1 NTU ; Free Chlorine < 0.5 PPM ; H₂S – Nil ; Organics – Nil. If feed water quality exceeds above limits, please call Rainfresh for advice on additional treatment that may be necessary.

HOW YOUR TANNIN FILTER WORKS

Your Rainfresh Tannin Filter removes tannins using a process called Ion Exchange. In this process, when untreated water flows through the unit, tannins are trapped by the media (called *Resin*) and an equivalent amount of chloride ions are released into the water. After every 3-4 days, the unit is re-charged by tannin filter salt in a process called *Regeneration*. During regeneration, the unit first backwashes to remove any sediment, rust or other particulates that may have accumulated in the unit. This is followed by introduction of a saturated salt solution (*brine*) that bumps off the trapped tannin molecules to drain and recharges the resin with chloride ions from the salt (sodium chloride).

Once you program the unit at the time of installation, the regeneration process happens automatically. All you need to do is to ensure that there is always enough salt in the salt tank.

SAFETY PRECAUTIONS



- Follow all applicable province/state and local regulations.
- Handle your water tannin filter carefully. Do not lie on side, turn upside down, drop or drag.
- This tannin filter uses salt (sodium chloride) to regenerate. Persons on sodium restricted diets should consider the added sodium as part of their overall intake. Potassium chloride can be used as an alternate in such situations. Please consult Rainfresh technical support.

CAUTIONS BEFORE INSTALLATION



- Install a pressure regulator and water hammer arrestor if pressure exceeds maximum rating at any time. **Note:** If daytime pressure is over 80 psi, night time pressure may exceed maximum pressure rating.
- Do not install on water that is microbiologically unsafe without adequate disinfection before or after the unit. For effective disinfection install a Rainfresh Drinking Water System or Rainfresh UV disinfection system.
- For use on cold water only.
- **Only use thread seal tape** (Teflon® tape) for fitting connections into unit. **DO NOT USE pipe dope or chemical sealants.**
- If water pipes are used to ground electrical system, install jumper wire (#4 gauge solid copper wire) across the unit to maintain proper grounding of your electrical system
- **Protect your unit from freezing** - drain the unit if freezing temperatures exist.
- **NOTE: IF SOLDER TYPE FITTINGS ARE USED DO NOT USE torch near inlet/outlet connections.** All solder joints should be made before joining pipe to filter head. Use only lead-free solder and flux.
- **DO NOT over-tighten** metal fittings on to unit connections.

- You will need tannin filter salt with this unit (not included). Tannin filter salt is sold at most retailers.
- Place the unit on a flat level surface. Do not place shims under the unit to level it. The weight of the unit full of water and salt can cause the tannin filter tank to crack at the shim.
- The unit should only be moved by 2 or more people due to heavy weight. Failure to do so can result in back or other injury.
- The unit must be installed in an area where there is reasonable access to the salt tank for regular salt filling.

INSTALLATION

Electrical Requirements:

- The automatic control valve requires a constant power supply - 110V AC. We recommend a GFI (ground fault interrupter) outlet within 5 feet of the tannin filter. Extension cords are not recommended.
- If water pipes are used to ground electrical system, you will need to install a jumper wire across the filter unit.


Unpacking the unit

The unit includes:


- 1) Tannin filter tank with control valve and bypass valve & brine (salt) tank




- 2) Inlet/outlet elbow fittings (2)
– ¾" Male NPT



- 3) Allen key (for ease of opening & closing bypass valve)



- 5) Drain hose (15 ft) with hose clamp



- 4) Brine overflow fitting



- 6) AC power adapter

Unpack the unit and place it at the location where you intend to install it.

- Stand back and look at the tannin filter to make sure it is standing straight up and not tilted to one side. Make sure your chosen location will be fairly level, dry, and protected from possible freezing conditions. The tannin filter can sit directly on the floor and will not corrode. DO NOT set the tannin filter onto make shift platforms as this can damage the salt tank, or may cause it to topple.
- The system has 3 connections - an inlet, an outlet, and a drain line connection. If you are looking at the back of the unit (fig 1), the inlet is on the left side. **Warning:** Make sure that you have correctly identified the inlet of the system. REVERSING THE CONNECTIONS WILL RESULT IN RESIN BEADS BEING THROWN INTO YOUR HOME'S PLUMBING SYSTEM CAUSING DAMAGE TO IT AS WELL AS THE TANNIN FILTER.
- The following pipe can be used for installing your new system - Copper, CPVC, and PEX are the most popular.


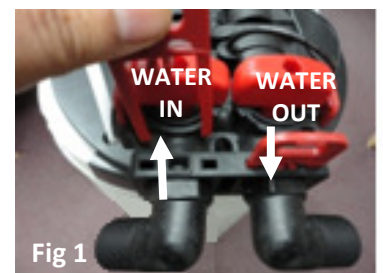


Fig 1

Installation Location

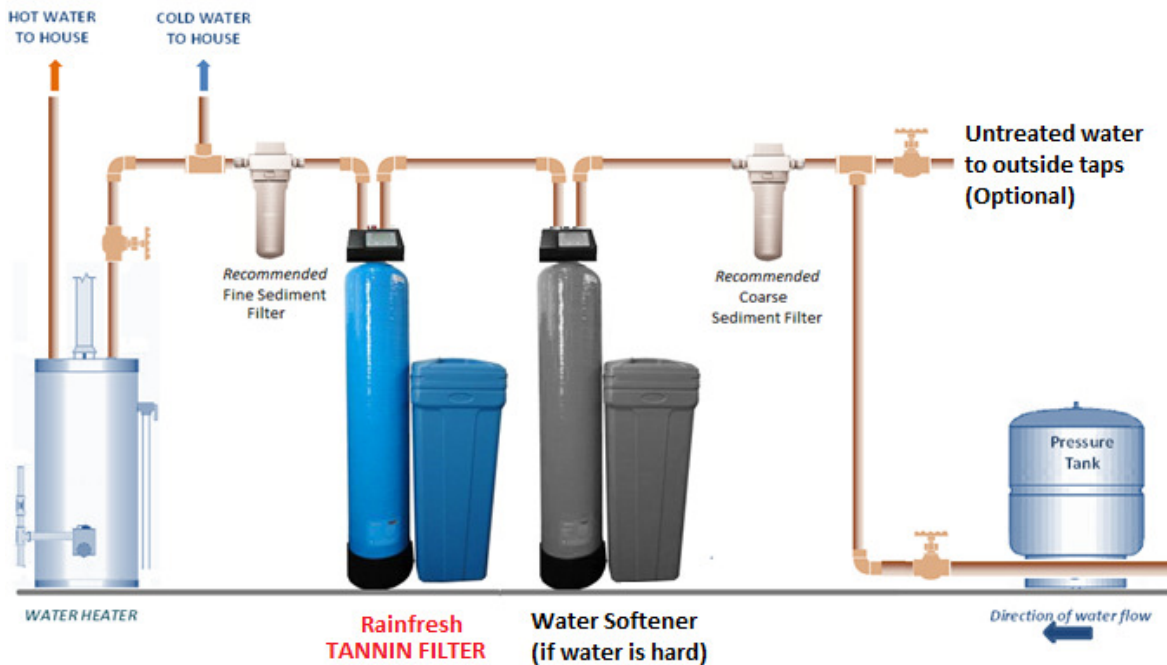


Plumbing in your tannin filter

- If your hot water tank is electric, turn off the power to it to avoid damage to the element in the tank.
- If you have a private well, turn the power off to the pump then shut off the main water shut off valve. If you have municipal water, simply shut off the main valve. Go to a faucet, (preferably on the lowest floor of the house) turn on the cold water until all pressure is relieved and the flow of water stops.
- Position the tannin filter in the desired location. The unit comes with two 90° ¾" male NPT elbow connections (see fig 2). You can turn them at any angle to suit your



installation. **Make sure that the bypass valve is in bypass mode as shown in fig 3A.**

- **Note:** To change the connection fitting, simply remove the locking clips by hand and pull the fitting out. Insert new fitting and reinstall locking clip (fig 3B).
- Plumb in the tannin filter using appropriate fittings.
- Attach the drain hose (15 ft included) to the drain fitting and secure it with a hose clamp (fig 4) (included).
- Run the drain line to a nearby laundry tub, standing pipe or floor drain (fig 5) and cut off excess tubing.

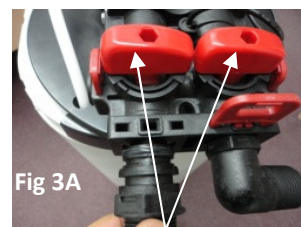

Bypass valve Closed.
Close both inlet & outlet valve



Fig 3B


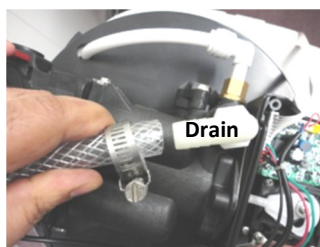




Fig 4

NOTE ABOUT DRAIN LINE : You can run the drain hose from the unit to the ceiling joists (max 8 ft ceiling) and run it to the nearest laundry tub or drain pipe. This can be run up overhead or down along the floor. Use band clamps to hold the drain tubing in place. If running drain line more than 15 feet from the tannin filter (max 25 ft), increasing the line size to 3/4" will be required. Please follow your local plumbing & other applicable codes for where to run tannin filter discharge water. **NEVER MAKE A DIRECT CONNECTION INTO A WASTE WATER DRAIN. A PHYSICAL AIR GAP OF AT LEAST 1.5" SHOULD BE USED TO AVOID BACTERIA AND WASTEWATER TRAVELING BACK THROUGH THE DRAIN LINE INTO THE TANNIN FILTER** (see fig 5)

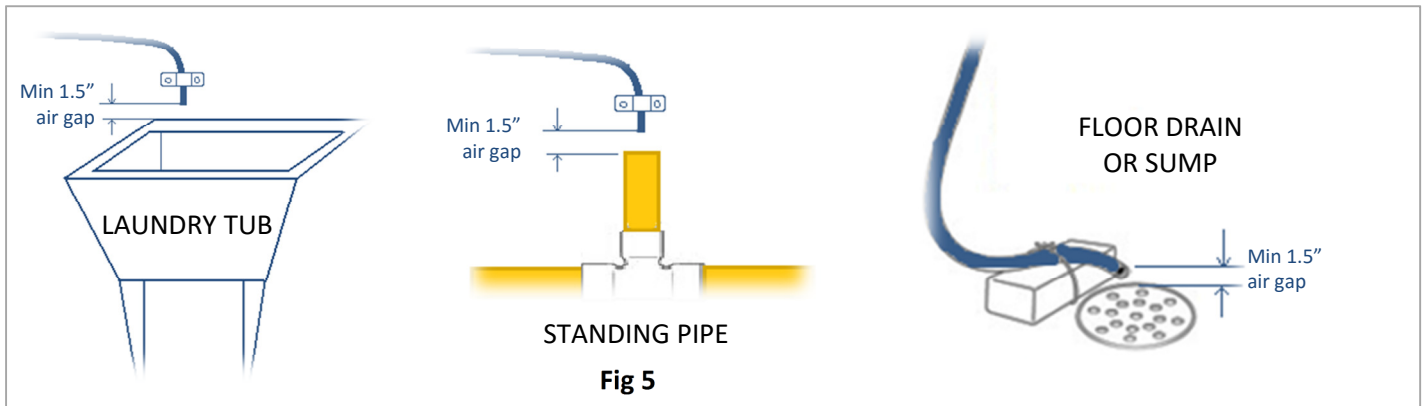

You can also use code-approved air-gap attachments available at most plumbing stores.

- Remove the lid on the salt tank. Insert the brine well into the appropriate slot at the bottom of the salt tank (**fig 6**). Slide the 3/8" tube through the hole on the side of the salt tank and connect it to the brine float as shown in **fig 7**.
- Remove locking clip on the brine outlet (**fig 8**) and insert other end of the 3/8" tube until it goes no further. Replace locking clip. The salt tank is flexible and can be moved around the tannin filter as long as it is connected to it through the 3/8" brine tube.
- Attaching the overflow tubing :** If the safety overflow is not already attached to the brine (salt) tank, drill a 3/4" hole on the side of the brine tank about 3/4 of the way from the bottom (**fig 9**). Insert the over flow fitting from the outside and tighten the nut from the inside to lock it in place.
- Attach the rest of the drain tubing to the overflow fitting and run to the floor drain with an appropriate air gap, as shown in **fig 5**. If you do not have any more drain tubing left, you will need to purchase extra tubing at your local plumbing retailer. A hose clamp is also recommended to hold the tubing on the fitting.
- Add about 5 gallons of water in the salt tank. This is not a critical level but just helps with the process for the first regeneration. Then add 2 bags (20 Kg bags) of salt to start with.
- Turn the main house shut-off valve on slightly and watch for leaks. Make sure a faucet is on somewhere and that any aerator is removed to avoid clogging from loosened scale in the pipes. If you have no leaks, proceed to the next steps.



Turn on the water supply

- Using the Allen key (included), **turn the bypass inlet slightly** to allow water to run into the unit. The water should initially fill the tank slowly. Once the tank is full of water, you can open valve fully. This prevents resin from being pushed up into the control head by the initial surge of water going in.
- Make sure there are no leaks in your plumbing before proceeding.
- At the nearest cold treated water tap remove the faucet screen and open the faucet. Using the Allen key (included), open the outlet side of the bypass valve and let water run a few minutes or until the system is free of any air or foreign material resulting from the plumbing work. Close the water tap when water runs clean, and then proceed to start up instructions.
- Connect the control valve to the power adapter (**fig 10**) & connect the adapter to the power supply.



NOTE: Your unit is not yet ready for service until you complete manual regeneration

START UP & PROGRAMMING

The control valve is controlled with simple, user-friendly electronics displayed on an LCD screen. The display screen can be lifted and mounted on a nearby wall (within 3 ft) for easy viewing (fig 8A). The display module has 2 screw slots at the back for wall-mounting.


When power is first supplied, the valve electronics may take up to two minutes to initialize. During this time the screen will show "INITIALIZING WAIT PLEASE". Do not touch any buttons at this time. When the valve reaches the service position, it will display the following information in sequence:

1. Date & Time
2. Capacity (*gal of water that can be used between regenerations*)
3. Volume Remaining (*gal of water left before regeneration begins*)
4. Regeneration Time (*Time of day when regeneration starts*)
5. Last Regeneration Date (*Last date when system regenerated*)
6. Current Flow Rate (GPM) (*flow rate of water being currently used*)
7. Peak Flow Rate (GPM) (*Max recorded flow rate of the water*)

The control valve has a display screen and 4 buttons

MENU BUTTON "☰"

The function of this key is to enter the level one programming mode where the valve settings can be adjusted.



UP / DOWN "▲▼"

These buttons are used to increase or decrease the value of the settings while in the programming mode.

SET / REGEN BUTTON "■"

This button has two functions. The first is to initiate a manual regeneration by holding the button for 3 or more seconds. The second function is while in programming mode, pressing this key allows the user to change the value of each setting.

PROGRAMMING YOUR WATER TANNIN FILTER


The valve has 2 levels of programming – Level 1 and Level 2

You will need to only go through Level 1 programming to start up your unit. Level 2 programming is factory set and can be changed only if desired.


In level 1 programming you can set current time, date, number of people in your home and the feed water hardness. Level 1 programming is completed in 5 easy steps.

Level 1 PROGRAMMING


STEP 1 : Set Current Time

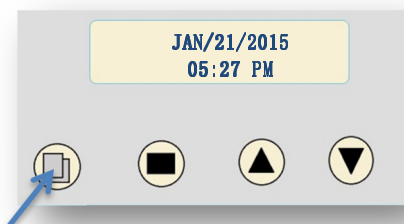


1. Press "☰" (MENU) for 3 seconds to unlock screen.

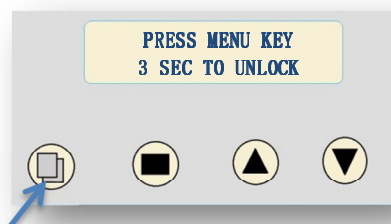


2. The display will read "Press MENU Key for 3 sec to unlock".
3. After 3 seconds, the display will beep confirming unlock

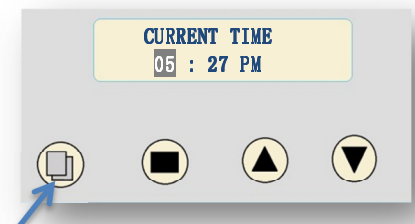


4. Press "☰" (MENU) again and the hour value becomes highlighted

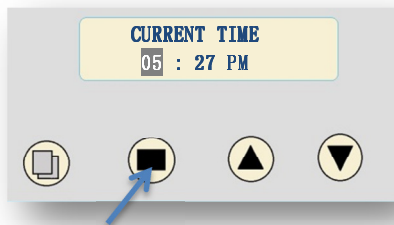


5. Press “■” (SET/REGEN) once and the highlighted value flashes.

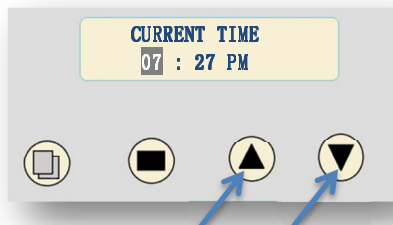


6. Now press “▲” (UP) or “▼” (DOWN) key to change the hour values to current time.

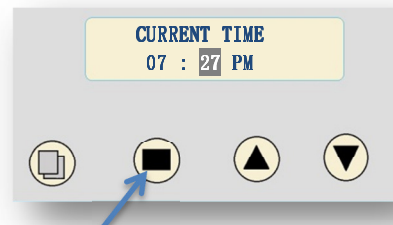


7. Press “■” (SET/REGEN) again. Hour value will be accepted and minute value will start flashing.

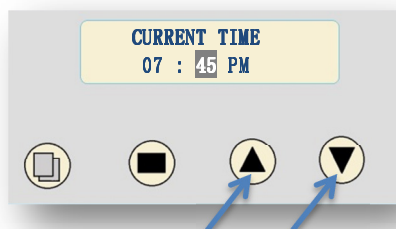


8. Now press “▲” (UP) or “▼” (DOWN) key to change the minute value to current time

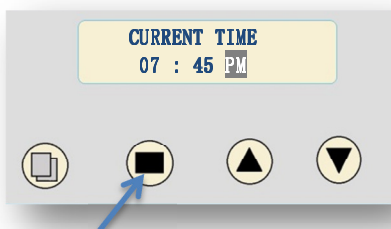

9. Press “■” (SET/REGEN) again. Minute value will be accepted and AM/PM value will start flashing.

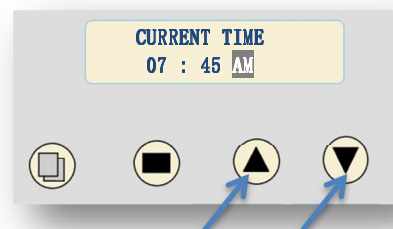


10. Now press “▲” (UP) or “▼” (DOWN) key to change the value to AM or PM

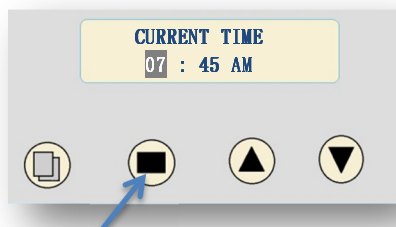


11. Press “■” (SET/REGEN) again to accept. Flashing stops & hour value is highlighted again. **PROCEED TO STEP 2**

STEP 2 : Set Current Date

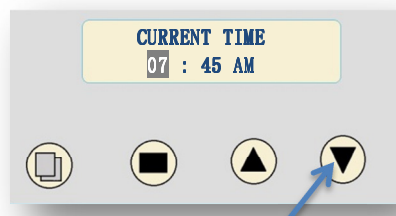

12. Press “▼” to advance to CURRENT DATE. The month value is highlighted

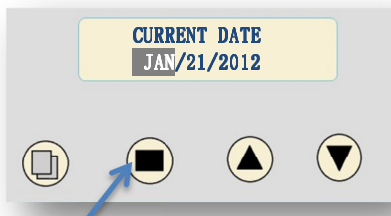

13. Press “■” again and the MONTH value flashes



14. Now press “▲” or “▼” key to change the value to current month




15. Press “■” again. Month value is accepted and the DAY starts flashing




16. Now press “▲” or “▼” key to change the value to current day of the month



17. Press “■” again. Date value is accepted and the YEAR starts flashing

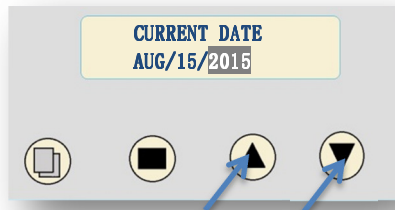


18. Now press “▲” or “▼” key to change the value to current day of the month

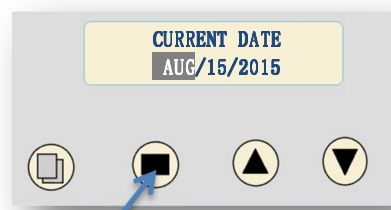


19. Press “■” again to accept. Flashing stops & MONTH value is highlighted again. **PROCEED TO STEP 3**


STEP 3 : Set Number of people in the house

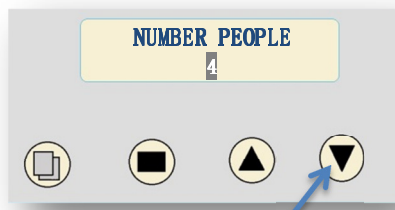


20. Press “▼” to advance to NUMBER OF PEOPLE

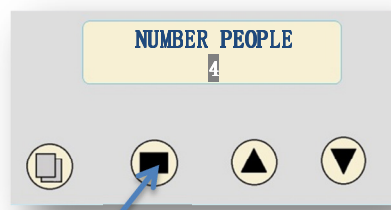


21. Press “■” once and the value flashes

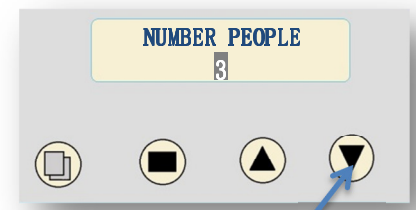

22. Press “▲ or ▼” to change the NUMBER OF PEOPLE in your home.

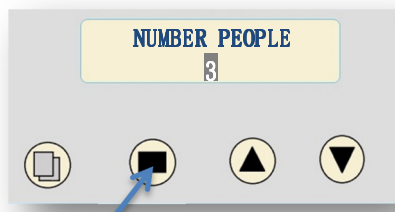

23. Press “■” again to accept the value. Highlight stops flashing.

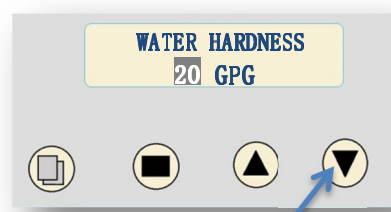


24. Press “▼” to advance to WATER HARDNESS. The value is highlighted
PROCEED TO STEP 4

STEP 4: Setting Water Hardness


Ignore this step as it is not applicable to the tannin filter

STEP 5: Setting Vacation Mode


This function may be activated during a prolonged absence, such as a vacation for more than 2 weeks. The system will perform a brief backwash and rinse based on advanced setting. The purpose is to keep the water fresh in the tannin filter tank and plumbing system. After returning from vacation, reset the VACATION MODE to "NO".

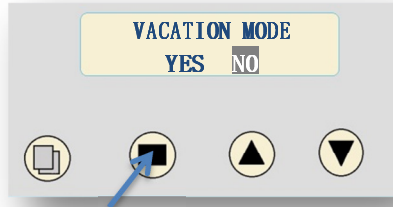

25. To set vacation mode, press "■" and "NO" flashes.

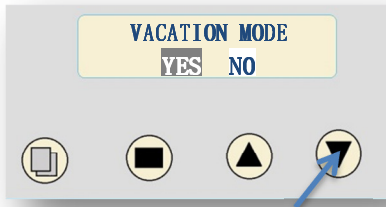

26. Press "▼" key to change setting to YES.
27. Press "■" to accept value

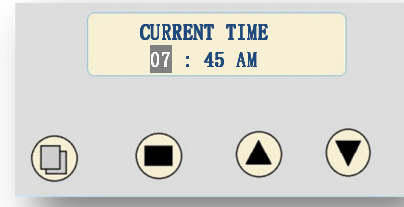

28. Press "▼" key and display shows current time with hour highlighted.
29. Press "□" to exit programming

The normal display will show the following in sequence


- Current date and time
- Regeneration days : 03 days (see level 2 programming)
- Remaining days : __ Days
- Regeneration time : 2:00 AM
- Last Regeneration date :
- Current Flow Rate : __ GPM (value displayed only when water is being used)
- Peak Flow Rate : __ GPM

YOUR UNIT IS NOW READY FOR SERVICE


Level 2 PROGRAMMING (OPTIONAL SETTINGS)

NOTE : Under normal use there is no need to change the settings under level 2 programming. You can, however, change the default settings if required. **CAUTION: DO NOT CHANGE LEVEL 2 SETTINGS WITHOUT CONSULTING RAINFRESH TECHNICIAN (1-800-667 8072).** Wrongly changing the settings can result in malfunction of the unit.


When the Level 2 Master Programming Mode is entered, all available option setting displays may be viewed and set as needed. Depending on current option settings, some parameters cannot be viewed or set.

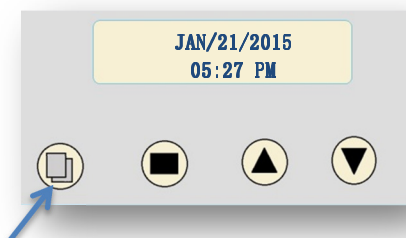

2. Press "□" (MENU) for 3 seconds to unlock screen.

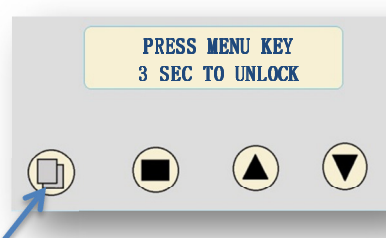

4. The display will read "Press MENU Key for 3 sec to unlock".
5. After 3 seconds, the display will beep confirming unlock

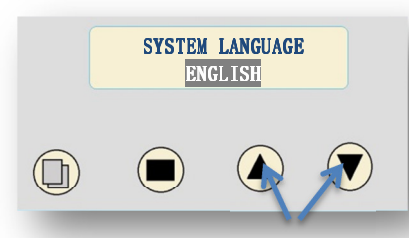

4. Press and hold "▲▼" together for three seconds to enter Level Two Master Programming.

To change any setting under level 2 programming

- press the “■” key and the value flashes
- press the “▲ or ▼” keys to change the value
- press the “■” key again to accept value
- press the “▼” key to advance to the next value

The following chart indicates choices and default settings. **Note:** Default settings are indicated in **bold letters**. Use same programming method as you used in level 1 to advance and/or change values.

Bold letters indicate default settings

	Parameter	Option 1	Option 2	Option 3	Option 4	Comments
1	System Language	English	Spanish	French		Set to French if desired. Spanish not enabled
2	Valve Operation	Softener	Filter	Iron Filter		Leave at default setting
3	Regeneration Mode	Meter Delayed	Meter Override	Calendar Clock	Meter Immediate	Leave at default setting
4	Regeneration Time	2:00 AM				The unit is factory set to regenerate at 2:00 AM on the day of regeneration. You can change to another time if desired.
5	Capacity Calculation	Automatic	Manual *			Manual (recommended)
6	Regen Days	3 days	Leave at default setting. Unit must regenerate every 3 days			
7	Backwash	05				Increase to 10 if water has lot of dirt or rust
8	Brine / Rinse	50				Increase to 60 if tannin levels are high
9	Rapid Rinse	5				Increase to 10 if you want a longer rinse time after regeneration
10	Refill	4.8				
11	Restore Default	NO				Leave at default. Change only if you would like to re-start programming from the beginning

* If you change the capacity calculation to automatic, the display shows several other parameters not listed here. Leave this setting at **MANUAL**

Disinfecting the Tannin filter

It is possible that during shipping, storage & installing, bacteria can go into the unit. Therefore, as a good installation practice, it is recommended that the tannin filter be disinfected prior to use. To disinfect, open the lid of the brine well in the salt tank and add approx. 3 tablespoons of fresh common household bleach. Replace lid & proceed to next step.



Manual Regeneration

If screen is locked, press “□ MENU” for 3 seconds to unlock. To initiate an immediate regeneration, press the **SET/REGEN** button for 3 seconds, an option for “Delayed” or “Immediate” regeneration will appear. Press the **SET/REGEN** button again and “Delayed” will begin flashing. Now press the down arrow button and “Immediate” will flash. Press the **SET/REGEN** button once and then press the menu button once. Valve will immediately start manual regeneration.

YOUR UNIT IS NOW READY FOR SERVICE

OTHER FEATURES

Control Operation During a Power Failure

In the event of a power failure, the valve will keep track of the time and day for 48 hours. The programmed settings are stored in a non-volatile memory and will not be lost during a power failure. If power fails while the unit is in regeneration, the valve will finish regeneration after power is restored. If the valve misses a scheduled regeneration due to a power failure, it will queue regeneration at the next regeneration time once power is restored.

Safety Float

The brine tank is equipped with a safety float which prevents your brine tank from overflowing as a result of a malfunction such as a power failure.

New Sounds

You may notice new sounds as your water tannin filter operates. The regeneration cycle lasts approximately 2 hours. During this time, you may hear water running intermittently to the drain.

Manual Bypass

In the case of emergency, such as an overflowing brine tank, you can isolate your water tannin filter from the water supply using the bypass valve located at the back of the control. To resume filtered water service, open bypass valve by rotating the knobs counterclockwise.

MAINTENANCE

Adding Salt

Fill the salt tank only with nugget or pellet salt that is specifically for water softeners only. **DO NOT USE rock salt, road salt or other types of impure salts.** Use only high grade water softener salt (Sodium Chloride). You can use Potassium Chloride but it will not regenerate the tannin filter as efficiently as softener salt and you will need to increase refill time (see page 10). Check the salt level monthly. It is important to **ALWAYS maintain the salt level above the water level.** To add salt, simply slide open the salt tank lid and add the salt directly into the brine tank. Be sure the brine well cover is on and fill only to the height of the brine well. The salt tank should never be empty. **DO NOT OVERFILL THE SALT TANK TO THE TOP.** 2-3 bags at a time are enough.

YOU WILL NOT BE ABLE TO SEE THE WATER ONCE YOU ADD A COUPLE OF BAGS OF SALT. IF YOU WANT TO CHECK THE WATER LEVEL, OPEN THE LID ON THE BRINE WELL.

Preventing and breaking a Salt Bridge

Humidity or wrong type of salt may create a cavity between the water and the salt. This action, known as “bridging”, prevents the brine solution from being made, leading to your water supply being hard. If you suspect salt bridging, pour some warm water over the salt to break up the bridge. Allow four hours to produce a brine solution, and then manually regenerate the tannin filter. This should always be followed up by allowing the unit to use up any remaining salt and then thoroughly cleaning out the brine tank.

If you are unable to break the bridge this way, take a strong rod and carefully push down the salt, working it up and down. **Do not** pound on the walls of the tank. If the wrong kind of salt has been used, take it out and fill with nugget or pellet salt.

Care of Your Tannin filter




To retain the attractive appearance of your new water tannin filter, clean occasionally with mild soap solution. Do not use abrasive cleaners, ammonia or solvents.

Cleaning the Injector Assembly

Sediment, salt and silt will restrict or clog the injector. A clean water supply and pure salt will prevent this from happening. The injector assembly is located on the right side of the control valve. This assembly is easy to clean.



Shut off the water supply to your tannin filter and reduce the pressure by opening a cold soft water faucet. Using a screwdriver, remove the two screws holding the injector cover to the control valve body. Carefully remove the assembly and disassemble as shown in Figure 6. The injector orifice is removed from the valve body by carefully turning it out with a large screwdriver. Remove the injector throat the same way. Carefully flush all parts including the screen. Use a mild acid such as vinegar to clean the small holes in the orifice and throat.

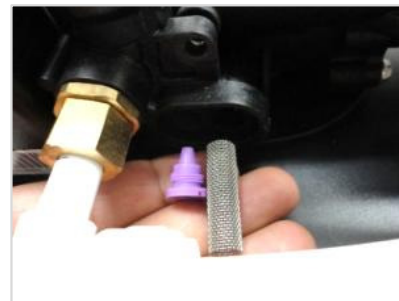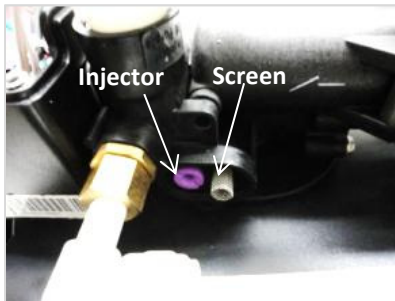

Reassemble using the reverse procedure.


TROUBLESHOOTING

ISSUE	POSSIBLE CAUSE	POSSIBLE SOLUTION
A. Unit fails to start a regeneration cycle	1. No power supply 2. Defective circuit board	1. Check electrical service & re-set time of day 2. Replace faulty parts
B. Filtered water has tannins	1. Bypass valve is closed 2. No salt in salt tank 3. Plugged injector/screen 4. Brine refill settings wrong 5. Leak between valve and riser tube 6. Internal valve leak	1. Open bypass valve 2. Add salt to salt tank 3. Clean parts (see page 9) 4. Correct brine refill settings (Table 1) 5. Check if riser is cracked or O-ring is damaged. Replace faulty parts 6. Replace valve seals, spacer and piston assembly
C. Salt use is high	1. Refill time is too high 2. Unit is set to regenerate more frequently than 3 days	1. Correct brine refill settings (table 1) 2. Set unit to regenerate once every 3 days
D. Low water pressure	1. Iron or scale buildup in line feeding tannin filter 2. Iron buildup inside valve or tank 3. Inlet of control valve plugged due to dirt	1. Clean/replace supply line 2. Clean control valve & add resin cleaner to clean bed. Increase regeneration frequency. Install proper pre-treatment 3. Clean control valve inlet
E. Resin in drain line	1. Air in water system 2. Incorrect or missing drain line flow control (DLFC)	1. Check well system for proper air elimination 2. Check and replace DLFC
F. Too much water in brine tank	1. Plugged injector or screen 2. Plugged brine valve 3. DLFC plugged	1. Clean parts (page 9) 2. Clean parts 3. Clean DLFC
G. Unit fails to draw brine	1. DLFC plugged 2. Injector or screen is plugged 3. Inlet pressure too low 4. Internal valve leak	1. Clean DLFC 2. Clean parts 3. Increase min pressure to at least 25 psi 4. Replace seals, spacer & piston assembly
H. Unit cycles continuously	1. Defective circuit board	1. Replace faulty parts
I. Water flows to drain continuously	1. Valve settings incorrect 2. Internal leak	1. Check valve settings 2. Replace seals, spacer & piston assembly
J. Tannin filter is leaking between the bypass valve and control valve	1. Possible O-ring leak	Check the metal adapter clips holding the 2 components together and tighten if necessary. Replace O-rings as required
K. Tannin filter is always flashing through different	This is normal	No action required

pieces of information		
L. I am having difficulty accessing level 2 programming?		Unlock the screen by pressing and holding the menu button for 3 seconds. Press and hold both up and down arrows until the system language appears. See video at http://rainfresh.ca/how_to_videos.php
M. My display screen is blank	1. Power cord may be unplugged from either adapter or receptacle 2. Defective circuit board	1. Re-connect power cord 2. Call Rainfresh to receive new circuit board with replacement instructions



Need help troubleshooting? Call Toll Free 1-800-667-8072 Monday to Friday 8:30 AM to 5 PM EST.

PARTS LIST

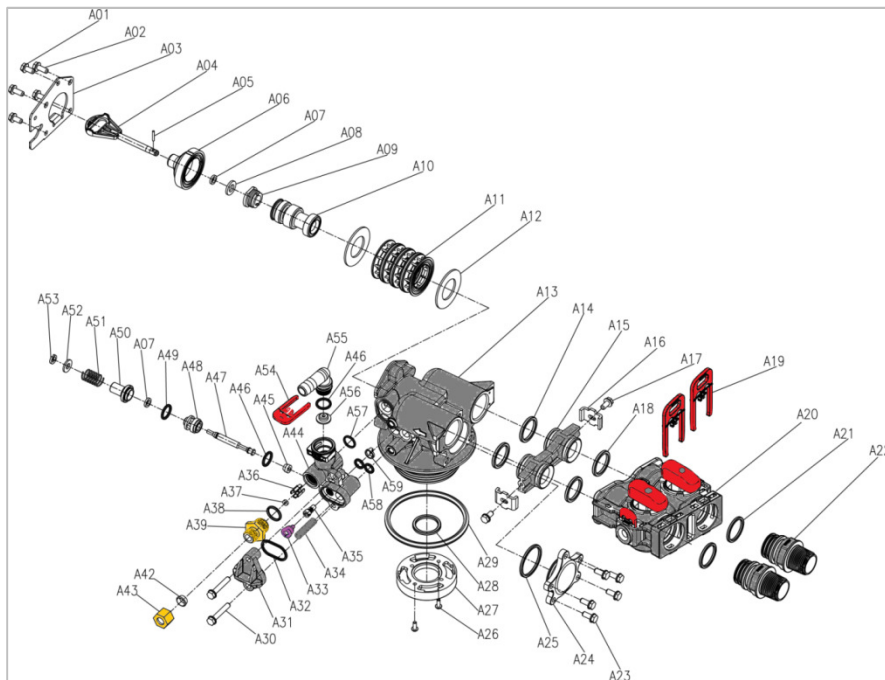

A27	07060007	Valve bottom connector	1
A28	26010103	O-ring ϕ 25x3.55	1
A29	05056063	O-ring ϕ 78.74x5.33	1
A32	05056072	O-ring ϕ 24x2	1
A33	05056027	Injector nozzle	1
A34	05056103	Injector screen	1
A35	05056028	Injector throat	1
A36	05056035	BLFC button retainer	1
A37	05056191	BLFC - 2#	1
A38	05056138	O-ring ϕ 14x1.8	1
A39	05056100B	BLFC fitting	1
A40	05056106	Brine line screen	1
A41	05056107	BLFC tube insert	1

Item No.	Part No.	Description	Qty
A01	05056087	Screw - M5x12 (Hexagon)	3
A02	05056088	Screw - M5x16 (Hexagon with washer)	2
A03	05056047	End plug retainer	1
A04	05030002	Piston rod	1
A05	05056097	Piston pin	1
A06	05056023	End plug	1
A07	05056070	Quad ring	2
A08	05056024	End plug washer	1
A09	05056022	Piston retainer	1
A10	05056181	Piston (electrical)	1
A11	05056104	Muffler	1
A12	05056021	Spacer	4
A13	05056073	Seal	5
A14	05030001	Valve body	1
A15	05056129	O-ring ϕ 23x3	4
A16	05056025	Adaper coupling	2
A17	05056044	Adaptor clip	2
A18	05056090	Screw-ST4. 2x13 (Hexagon with washer)	2
A19	21709003	Secure clip	2
A20	05056140	Valve connector	1
A21	05056065	O-ring ϕ 23.6x2.65	2
A22	21319006	Screw adaptor	2
A23	05056508	Screw M5x12 (Hexagon with washer)	5
A24	05030004	End cover	1
A25	05030013	O-ring ϕ 30x2.65	1
A26	13000426	Screw-ST2. 9x13 (Large)	2

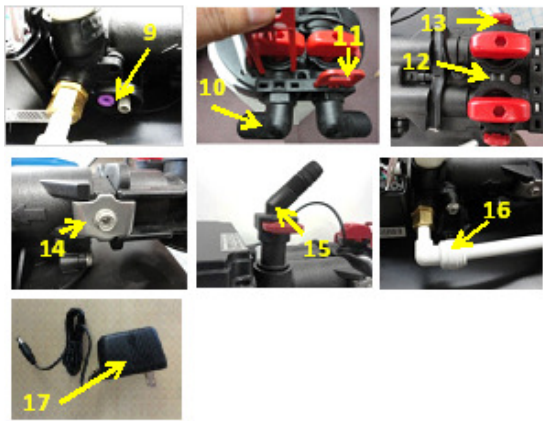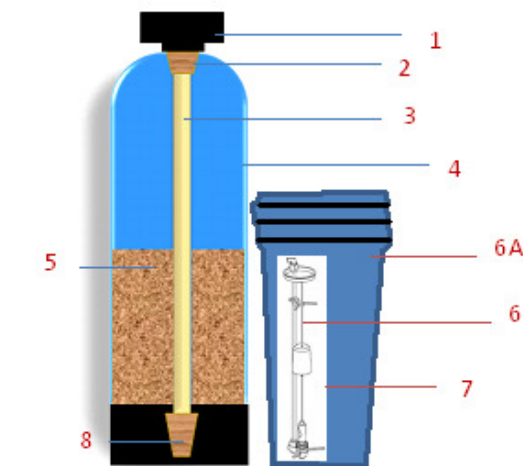

PARTS LIST	
PART #	DESCRIPTION
1	Control Valve
2	Top Distributor
3	Central Tube (Riser)
4	Media Tank for model 30T – 9"x 48"
	Media Tank for model 45T – 10"x 54"
	Media Tank for model 60T – 12"x 52"
5	Softener Resin
6	Safety Brine Valve
6A	Brine Tank (salt tank)
7	Brine Well
8	Bottom Distributor
9	Injector & screen assembly
10	Inlet/Outlet Fitting - elbow (90°) – ¾"
11	Locking Clip for inlet/outlet
12	Bypass valve assembly
13	Locking clip for bypass valve
14	Bypass valve metal clips and screw set
15	Drain fitting (Elbow)
16	Brine elbow fitting 3/8 stem x 3/8 QC
17	AC Power Adapter

Limited Warranty:

This Tannin filter System is warranted to the original Consumer purchaser for a period of one (1) year, from the date of purchase, against defects in materials or workmanship. The electronic controls and mineral tank are warranted for 5 and 10 years respectively against defects in materials or workmanship. The company's obligation under this warranty shall consist of repair or replacement, at its option, of any part found by company inspection to be defective, provided that the product has not been misused, abuse, altered or damaged by Consumer with respect to the original installation, as determined by the company. This warranty will not apply if water passing through the System has a) Turbidity / Suspended Solids > 5 ppm (mg/l). b) Hydrogen Sulphide concentrations greater than 0.05 ppm (0.05 mg/l). c) Iron concentration greater than 0.3 ppm (0.3 mg/l), d) Manganese greater than 0.05 ppm (0.05 mg/l), e) Tannins or colour, f) water hardness > 3 GPG or other feed

water conditions that exceed the water quality requirements of the tannin filter. This limited Warranty applies only to a unit when returned to the Warrantor at the owner's expense and in accordance with shipping instructions received from the Warrantor. This warranty does NOT cover, and is intended to exclude, any liability on the part of Envirogard for any incidental damages, consequential damages, labour charges or any other costs incurred in connection with the purchase, installation, use, maintenance or repair of the system whether under this warranty or any other warranty implied by law. Some provinces/states do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights, which vary from province/state to province/state. This warranty applies only to water filter/systems purchased in Canada or the U.S.A.

Feb 2016



Envirogard Products Limited

6-446 Major Mackenzie Drive East, Unit 6
Richmond Hill, ON L4C 1J2, Canada

Tel : (905) 884 9388 Helpline: 1800 667 8072

Web: www.rainfresh.ca